



Step 1:

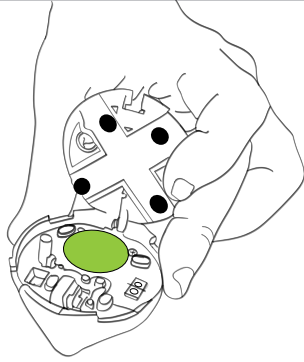


Remove back plate

Step 2:

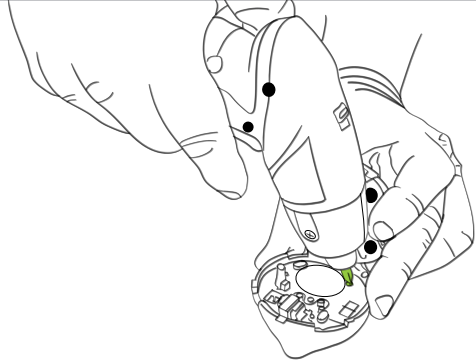


Remove battery screws

Step 3:

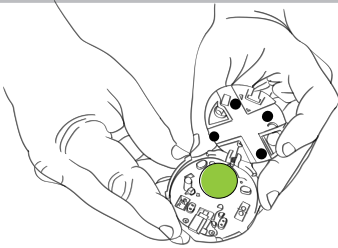


Remove battery lid

Step 4:

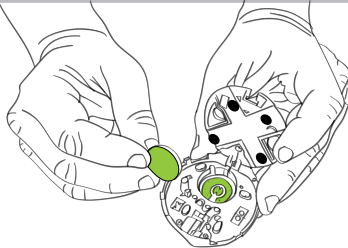


Remove / replace exposed battery

Step 5:

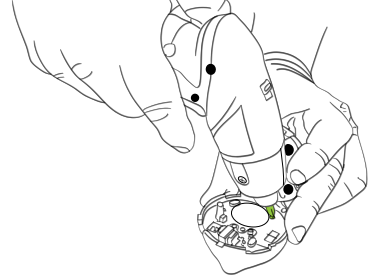


Replace battery screws

Step 6:

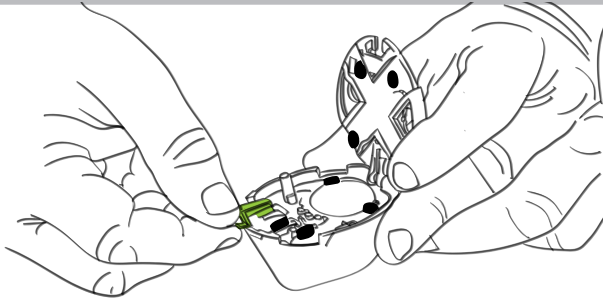


Replace Clutch Retainer

Step 7:

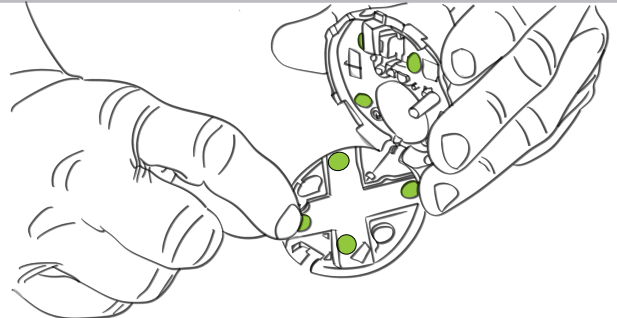


Install adhesive pads

Step 8:

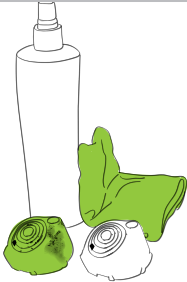

Clean materials

Step 9:

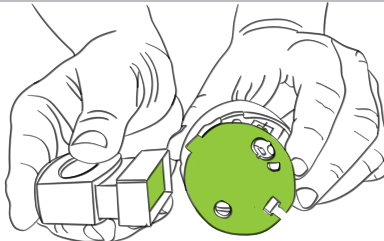

Apply date stamp

Step 10:



Function check

20190503